



Flat Beam M Series

Flat Beams Are Superior

The four most important requirements of a torque wrench, accuracy, reliability, durability, and low ownership cost, are combined into these exceptional tools. Accuracy is literally ground into the wrench. The special alloy steel beam is ground to a rate of deflection with the use of dead weights, rather than a dimensional tolerance. This process is time consuming and very labor intensive, but the result is a tool that remains accurate as long as the beam is intact and the pointer is on zero under no-load condition. The flat shape of the beam insures the wrench remains at a right angle to the fastener, reducing or eliminating side-loading error. This unique taper-grinding distributes stress evenly along the entire length of the beam, extending tool life indefinitely. With a minimum of moving parts, these tools are virtually repair and maintenance free.

M Series Features

- Incredibly durable design - actual service life frequently measured in decades!
- Very low cost of ownership - exceptional accuracy retention permits extended calibration intervals, and they are virtually maintenance and repair free!
- Ideal for prevailing-torque and destructive testing applications.
- Low mass/low inertia design of pointers helps eliminate reading distortion.
- Memory feature consists of fingers which follow a track in the scale and remain in place to indicate maximum torque achieved.
- Peak torque indicated on scale is accurate, even on destructive testing applications.
- Pivoted handle concentrates load at precise point on lever to assure torque accuracy.
- Meets or exceeds ASME B107.14M and ISO 6789.
- Accuracy of all flat beams is +/- 2% of indicated value from 20% to 100% of capacity, in both directions.
- Includes FREE ISO/IEC 17025 tabulated certification!




Crowfoot Adapter

- Gain the significant advantage of our interchangeable head system by attaching the SRA to any fixed square drive wrench.
- Ideal for use when a direct reading torque wrench is required but space is limited.
- Use of an adapter requires calculation of torque output.
- When used with our 1 7/16" Interchangeable Heads the adapter length will be 3".



Flat Beam Memory Series - English

Part Number	Model	Torque Capacity	Steps of Graduations	Square Drive	Lever Arm Distance	Weight (lbs.)
●850233	M 32 IO	0-32 in. ozs.	2 in. ozs.	¼ in.	6.0 in.	0.2
●850254	M 80 IO	0-80 in. ozs.	5 in. ozs.	¼ in.	6.2 in.	0.25
●850202	M 160 IO	0-160 in. ozs.	10 in. ozs.	¼ in.	6.0 in.	0.25
●850188	M 10 l	0-10 in. lbs.	½ in. lb.	¼ in.	6.0 in.	0.25
●850222	M 25 l	0-25 in. lbs.	1 in. lb.	⅜ in.	6.3 in.	0.4
●850242	M 50 l	0-50 in. lbs.	2 in. lbs.	⅜ in.	6.0 in.	0.4
●850191	M 100 l	0-100 in. lbs.	5 in. lbs.	⅜ in.	6.5 in.	0.4
●850211	M 200 l	0-200 in. lbs.	10 in. lbs.	⅜ in.	9.0 in.	0.5
■850228	M 300 l	0-300 in. lbs.	10 in. lbs.	⅜ in.	13.5 in.	2.75
■850246	M 600 l	0-600 in. lbs.	25 in. lbs.	⅜ in.	13.5 in.	2.75
■850247	M 600 l	0-600 in. lbs.	25 in. lbs.	½ in.	13.5 in.	2.75
■850195	M 1200 l	0-1200 in. lbs.	50 in. lbs.	½ in.	15.0 in.	2.75
■850205	M 1800 l	0-1800 in. lbs.	50 in. lbs.	½ in.	18.0 in.	3.75
■850220	M 25	0-25 ft. lbs.	1 ft. lb.	⅜ in.	13.5 in.	2.75
■850240	M 50	0-50 ft. lbs.	2 ft. lbs.	⅜ in.	13.5 in.	2.75
■850241	M 50	0-50 ft. lbs.	2 ft. lbs.	½ in.	13.5 in.	2.75
■850190	M 100	0-100 ft. lbs.	5 ft. lbs.	½ in.	15.0 in.	2.75
■850198	M 150	0-150 ft. lbs.	5 ft. lbs.	½ in.	18.0 in.	3.75
■850227	M 300	0-300 ft. lbs.	10 ft. lbs.	¾ in.	30.0 in.	10.75

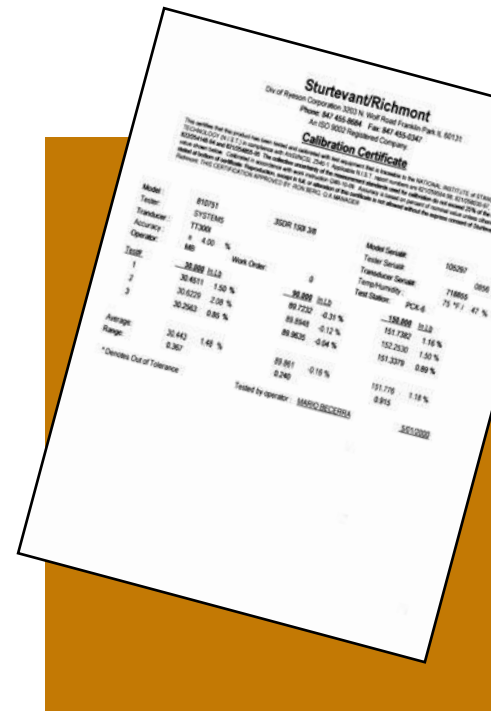

Flat Beam Memory Series - Newton Metre

Part Number	Model	Torque Capacity	Steps of Graduations	Square Drive	Lever Arm Distance	Weight (lbs.)
●855276	M 110 cNm	0-110 cNm	5 cNm	¼ in.	6.0 in.	0.25
●855280	M 1 Nm	0-1 Nm	.05 Nm	¼ in.	6.0 in.	0.25
●855281	M 2.5 Nm	0-2.5 Nm	.1 Nm	⅜ in.	6.3 in.	0.34
●855282	M 5 Nm	0-5 Nm	.2 Nm	⅜ in.	6.0 in.	0.34
●855283	M 12 Nm	0-12 Nm	.5 Nm	⅜ in.	6.3 in.	0.38
●855284	M 22 Nm	0-22 Nm	1 Nm	⅜ in.	9.0 in.	0.50
■855285	M 34 Nm	0-34 Nm	1 Nm	⅜ in.	13.5 in.	2.75
■855287	M 70 Nm	0-70 Nm	2 Nm	⅜ in.	13.5 in.	2.75
■855288	M 70 Nm	0-70 Nm	2 Nm	½ in.	13.5 in.	2.75
■855289	M 140 Nm	0-140 Nm	5 Nm	½ in.	15.0 in.	2.75
■855290	M 210 Nm	0-210 Nm	10 Nm	½ in.	18.0 in.	3.75
■855292	M 410 Nm	0-410 Nm	10 Nm	¾ in.	30.0 in.	10.75



● Pivoted Ball Handle



■ Pivoted Handle



Crowfoot Adapter

Part Number	Model	Description
850653	SRA-¾	¾ Female-Male Dovetail
850655	SRA-½	½ Female-Male Dovetail

WESTEC[®] - Sales & Services In India

Office No. 12, 1st Floor, Hermes Atrium,
B wing, Plot 57, Sector – 11,
CBD Belapur, Navi Mumbai – 400 614

Mob: 9821 0327 20 | Tel:+91-22-2756 6533
Telefax: +91-22-2756 6534 | Website - <http://westec-india.com/>
E-mail: westecnavimumbai@vsnl.net